

PRODUCT SPECIFICATION

650 Series DIN Rail Single Output Power Supplies



FEATURES & BENEFITS

- Universal AC Input / Full Range
- Protections: Short circuit / Overload / Over Voltage / Over temperature
- ZCS/ZVS technology to reduce power dissipation
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- DC OK relay contact
- No load power consumption<1W
- LED indicator for power on
- 100% full load burn-in-test
- 2 year warranty



SPECIFICATIONS

MODEL		650.96.01.03.01		650.96.01.04.01		650.96.01.05.01	
OUTPUT	DC VOLTAGE	12V		24V		48V	
	RATED CURRENT	7.5A		4A		2A	
	CURRENT RANGE	0 ~ 7.5A		0 ~ 4A		0 ~ 2A	
	RATED POWER	90W		96W		96W	
	RIPPLE & NOISE (max.) Note.2	120mVp-p		150mVp-p		200mVp-p	
	VOLTAGE ADJ. RANGE	12 ~ 15V		24 ~ 30V		48 ~ 56V	
	VOLTAGE TOLERANCE Note.3	± 1.0%		± 1.0%		± 1.0%	
	LINE REGULATION	± 1.0%		± 1.0%		± 1.0%	
	LOAD REGULATION	± 1.0%		± 1.0%		± 1.0%	
	SETUP, RISE TIME Note.5	3000ms, 50ms/220VAC		3000ms, 50ms/115VAC at full load			
HOLD UP TIME (Typ.)	50ms/220VAC		20ms/115VAC at full load				
INPUT	VOLTAGE RANGE Note.6	85 ~ 264VAC		120 ~ 370VDC			
	FREQUENCY RANGE	47 ~ 63Hz					
	POWER FACTOR (Typ.)	PF ≥ 0.95/220VAC		PF ≥ 0.98/115VAC at full load			
	EFFICIENCY (Typ.)	85%		86%		88%	
	AC CURRENT (Typ.)	1.3A/115VAC		0.8A/220VAC			
	INRUSH CURRENT (Typ.)	COLD START 30A/115VAC		60A/220VAC			
	LEAKAGE CURRENT	<1mA / 240VAC					
PROTECTION	OVERLOAD	105 ~ 150% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed					
	OVER VOLTAGE	15.6 ~ 18V		31.2 ~ 36V		57.6 ~ 64.8V	
	OVER TEMPERATURE	Shut down o/p voltage, auto-recovery or re-power on to recover					
FUNCTION	DC OK SIGNAL	Relay contact rating(max.): 30V/1A resistive					
ENVIRONMENT	WORKING TEMP.	-10 ~ +60°C (Refer to "Derating Curve")					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH					
	TEMP. COEFFICIENT	± 0.03%/ °C(0 ~ 50 °C)					
	VIBRATION	Component : 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes ; Mounting : Compliance to IEC60068-2-6					
SAFETY & EMC (Note 4)	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25 °C 70% RH					
	EMC EMISSION	Compliance to EN55011, EN55022 (CISPR22), EN61204-3 Class B, EN61000-3-2,-3					
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN61000-6-2, EN61204-3, heavy industry level, criteria A					
OTHERS	MTBF	346K hrs min. MIL-HDBK-217F (25°C)					
	DIMENSION	55*90*100mm (W*H*D)					
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rate load and 25 °C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer "EMI testing of component power supplies". 5. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time.						

Model Number Structure - Power Supplies



650.96.01.03.01

Series	
650 Series Power Supplies	


Output Wattage	
96	96W

Optional	
01	with Din Rail


Output Voltage DC	
03	12V 7.5A
04	24V 4A
05	48V 2A

Input Voltage AC	
00	110V
01	220V

Mechanical Specification

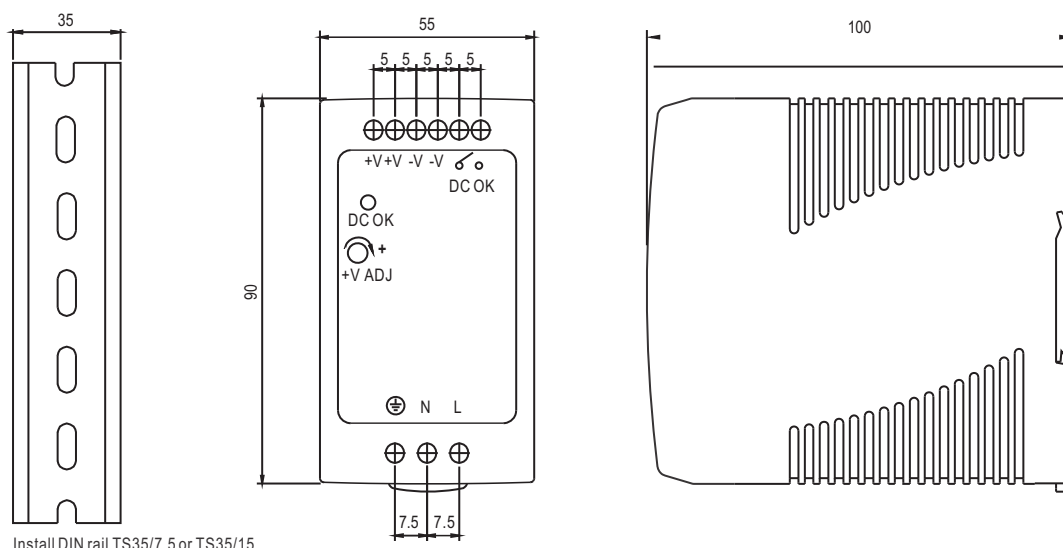


Block Diagram

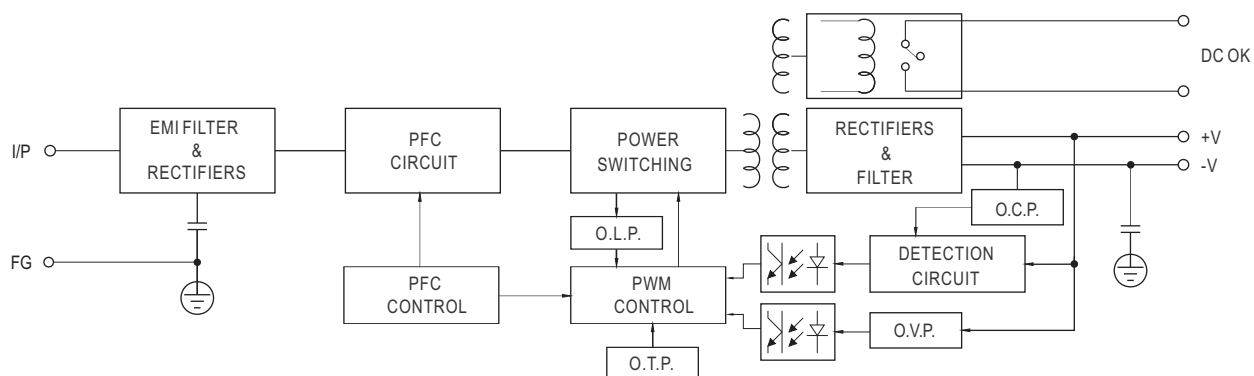


DC OK Relay Contact

Contact Close	PSU turns on / DC OK.
Contact Open	PSU turns off / DC Fail.
Contact Ratings (max.)	30V/1A resistive load.

Derating Curve

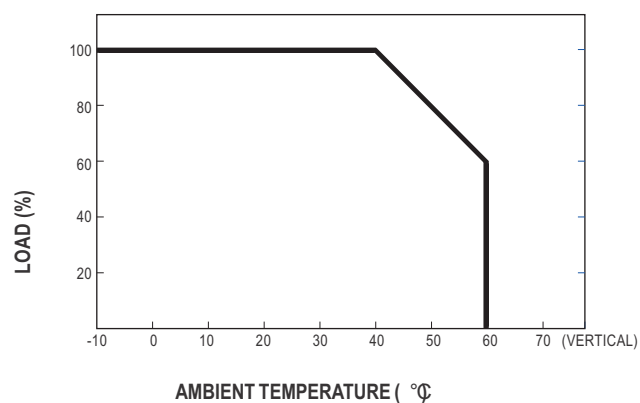

Output Derating VS Input Voltage

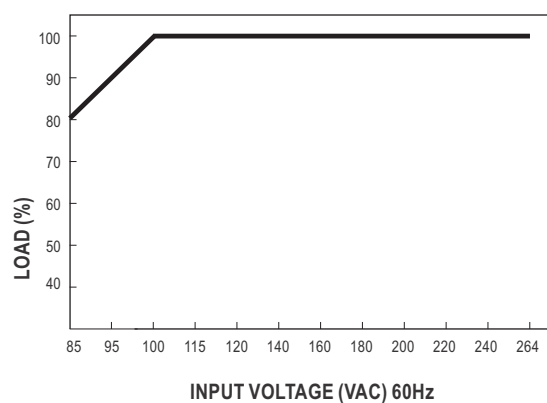

FEATURES & BENEFITS


- Universal AC input / Full range
- Built in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- UL 508(industrial control equipment)approved
- LED indicator for power on
- 100% full load burn-in test
- Fixed switching frequency at 100KHz
- 3 years warranty



SPECIFICATIONS


MODEL		650.240.01.04.01		650.240.01.05.01	
OUTPUT	DC VOLTAGE	24V		48V	
	RATED CURRENT	10A		5A	
	CURRENT RANGE	0 ~ 10A		0 ~ 5A	
	RATED POWER	240W		240W	
	RIPPLE & NOISE (max.) Note.2	80mVp-p		150mVp-p	
	VOLTAGE ADJ. RANGE	24 ~ 28V		48 ~ 53V	
	VOLTAGE TOLERANCE Note.3	±1.0%		±1.0%	
	LINE REGULATION	±0.5%		±0.5%	
	LOAD REGULATION	±1.0%		±1.0%	
	SETUP, RISE TIME	800ms, 40ms/230VAC		800ms, 40ms/115VAC at full load	
HOLD UP TIME (Typ.)	24ms/230VAC	24ms/115VAC at full load			
INPUT	VOLTAGE RANGE Note.5	85 ~ 264VAC	120 ~ 370VDC		
	FREQUENCY RANGE	47 ~ 63Hz			
	POWER FACTOR (Typ.)	0.96/230VAC	0.99/115VAC at full load		
	EFFICIENCY (Typ.)	84%		85%	
	AC CURRENT (Typ.)	2.8A/115VAC	1.4A/230VAC		
	INRUSH CURRENT (Typ.)	COLD TART 27A/115VAC		45A/230VAC	
	LEAKAGE CURRENT	<3.5mA / 240VAC			
PROTECTION	OVERLOAD	105 ~ 150% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed			
	OVER VOLTAGE	30 ~ 36V Protection type : hut down o/p voltage, re-power on to recover		54 ~ 60V	
	OVER TEMPERATURE	100℃±5℃ (T W1)d etect on heat sink of power transistor Protection type : hut down o/p voltage, recovers automatically after t emperature goes down			
ENVIRONMENT	WORKING TEMP. Note.5	-10 ~ +70℃ (Refer to output load derating curve)			
	WORKING HUMIDITY	20 ~ 90% RH non-condensing			
	STORAGE TEMP., HUMIDITY	-20 ~ +85℃, 10 ~ 95% RH			
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 50℃)			
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6			
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL508, UL60950-1, TUV EN60950-1 approved			
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC			
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC			
	EMI CONDUCTION & RADIATION	Compliance to EN55011,EN55022 (CI PR22) Class B			
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3			
	EMC EMISSION	Compliance to EN61000-4-2,3,4,5,6,8,11, ENV50204, EN55024, EN61000-6-2 (EN50082-2), heavy industry level, criteria A			
OTHERS	MTBF	105.5Khrs min. MIL-HDBK-217F (25℃)			
	DIMENSION	125.5*125.2*100mm (W*H*D)			
	PACKING	1.2Kg; 12pcs/15.5Kg/1.29CUFT			
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 5. Derating may be needed under low input voltages. Please check the derating curve for more details.				

Mechanical Specification

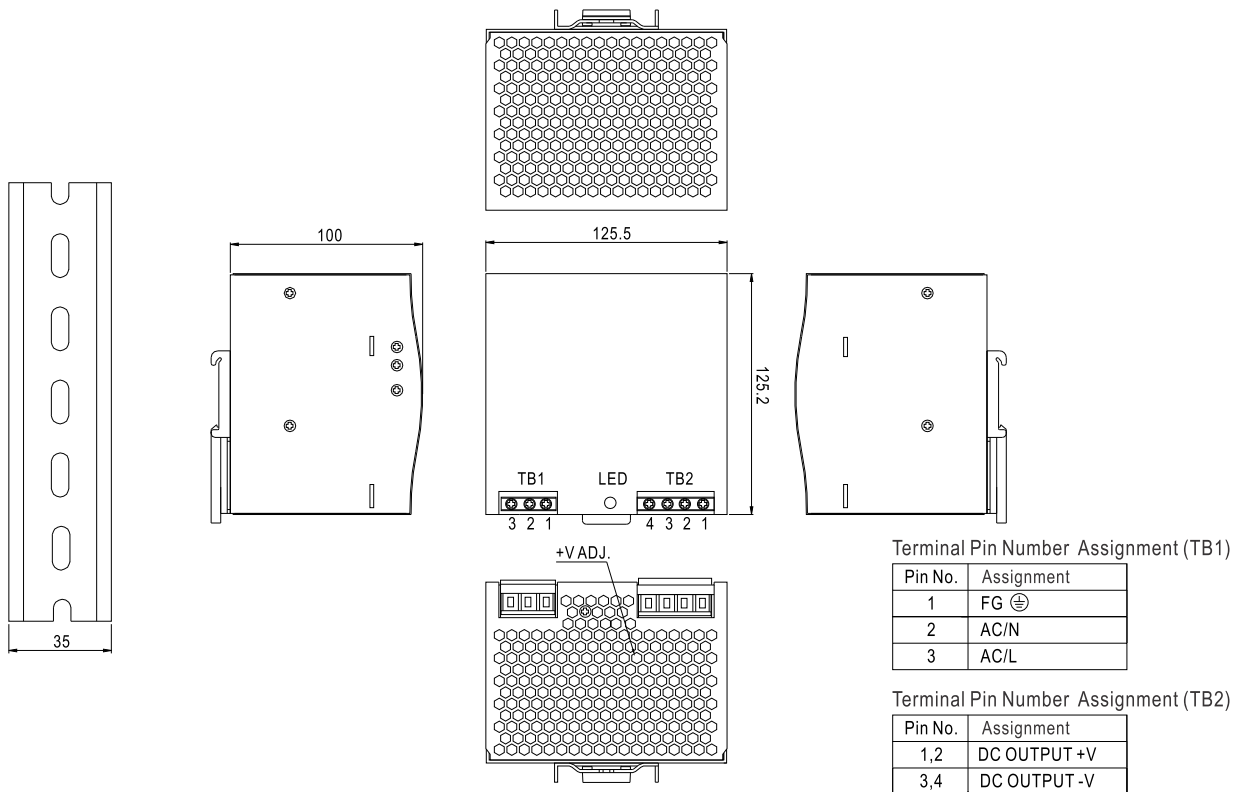


fosc : 100KHz


Block Diagram

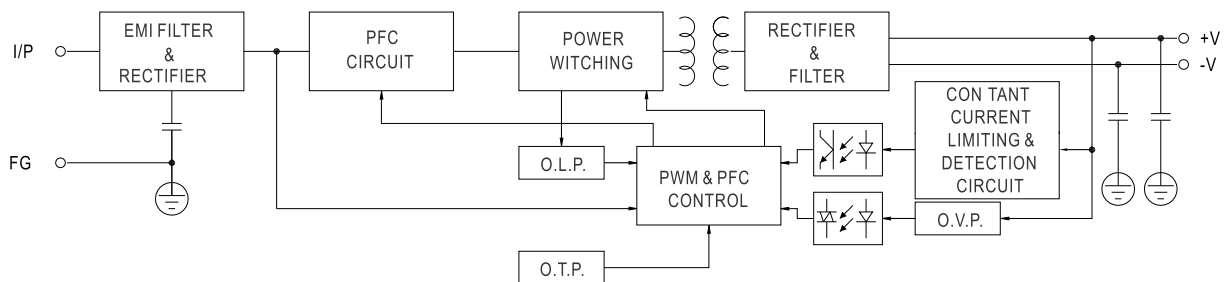

Derating Curve

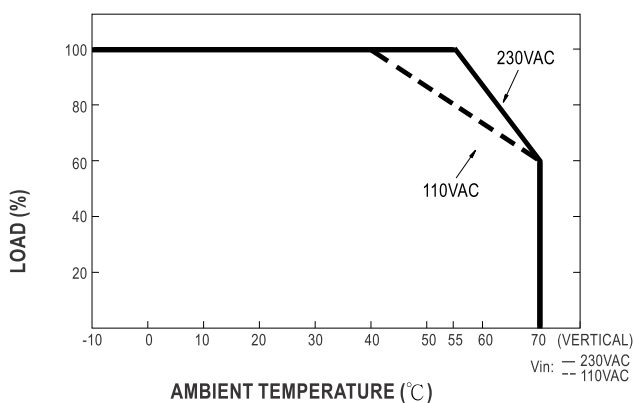

Output Derating VS Input Voltage

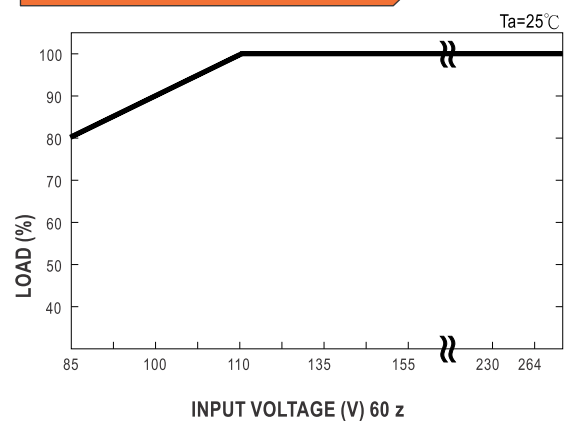




FEATURES & BENEFITS

- Universal AC Input / Full Range
- Protections: Short circuit / Overload / Over Voltage / Over temperature
- ZCS/ZVS technology to reduce power dissipation
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- DC OK relay contact
- No load power consumption < 1W
- LED indicator for power on
- 100% full load burn-in-test
- 2 year warranty


SPECIFICATIONS

MODEL		650.240.01.04.01		650.240.01.05.01	
OUTPUT	DC VOLTAGE	24V		48V	
	RATED CURRENT	10A		5A	
	CURRENT RANGE	0 ~ 10A		0 ~ 5A	
	RATED POWER	240W		240W	
	PEAK CURRENT	15A		7.5A	
	PEAK POWER Note.6	360W (3sec.)			
	RIPPLE & NOISE (max.) Note.2	100mVp-p		120mVp-p	
	VOLTAGE ADJ. RANGE	24 ~ 28V		48 ~ 55V	
	VOLTAGE TOLERANCE Note.3	± 1.0%		± 1.0%	
	LINE REGULATION	± 0.5%		± 0.5%	
	LOAD REGULATION	± 1.0%		± 1.0%	
	SETUP, RISE TIME	1500ms, 60ms/230VAC 3000ms, 60ms/115VAC at full load			
	HOLD UP TIME (Typ.)	20ms/230VAC		20ms/115VAC at full load	
INPUT	VOLTAGE RANGE	88 ~ 264VAC	124 ~ 370VDC		
	FREQUENCY RANGE	47 ~ 63Hz			
	POWER FACTOR (Typ.)	0.93/230VAC	0.99/115VAC at full load		
	EFFICIENCY (Typ.) Note.8	94%			
	AC CURRENT (Typ.)	2.6A/115VAC	1.3A/230VAC		
	INRUSH CURRENT (Typ.)	33A/115VAC	65A/230VAC		
	LEAKAGE CURRENT	<1mA / 240VAC			
PROTECTION	OVERLOAD	Normally works within 110 ~ 150% rated output power for more than 3 seconds and then shut down o/p voltage with auto-recovery >150% rated power, constant current limiting with auto-recovery within 2 seconds and may cause to shut down if over 2 seconds			
	OVER VOLTAGE	29 ~ 33V		56 ~ 65V	
		Protection type : Shut down o/p voltage with auto-recovery			
	OVER TEMPERATURE	95°C± 5°C (TSW : detect on heatsink of power switch) Protection type : Shut down o/p voltage, recovers automatically after temperature goes down			
FUNCTION	DC OK REALY CONTACT RATINGS (max.)	60Vdc/0.3A, 30Vdc/1A, 30Vac/0.5A resistive load			
ENVIRONMENT	WORKING TEMP. Note.5	-25 ~ +70°C (Refer to "Derating Curve")			
	WORKING HUMIDITY	20 ~ 95% RH non-condensing			
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH			
	TEMP. COEFFICIENT	± 0.03%/°C (0 ~ 50°C)			
	VIBRATION	Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6			
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL508, TUV EN60950-1 approved			
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC	I/P-FG:2KVAC	O/P-FG:0.5KVAC	O/P-DC OK:0.5KVAC
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25°C/ 70% RH			
	EMC EMISSION	Compliance to EN55011, EN55022 (CISPR22), EN61204-3 Class B, EN61000-3-2,-3			
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN61000-6-2 (EN50082-2), EN61204-3, heavy industry level, criteria A, SEMI F47, GL approved			
OTHERS	MTBF	169.3K hrs min. MIL-HDBK-217F (25°C)			
	DIMENSION	63*125.2*113.5mm (W*H*D)			
	PACKING	1.03Kg; 12pcs/13.4Kg/1.06CUFT			
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended. 6. 3 seconds max., please refer to peak loading curves. 7. Derating may be needed under low input voltage. Please check the derating curve for more details. 8. After 30 minutes of burn-in.				

Mechanical Specification

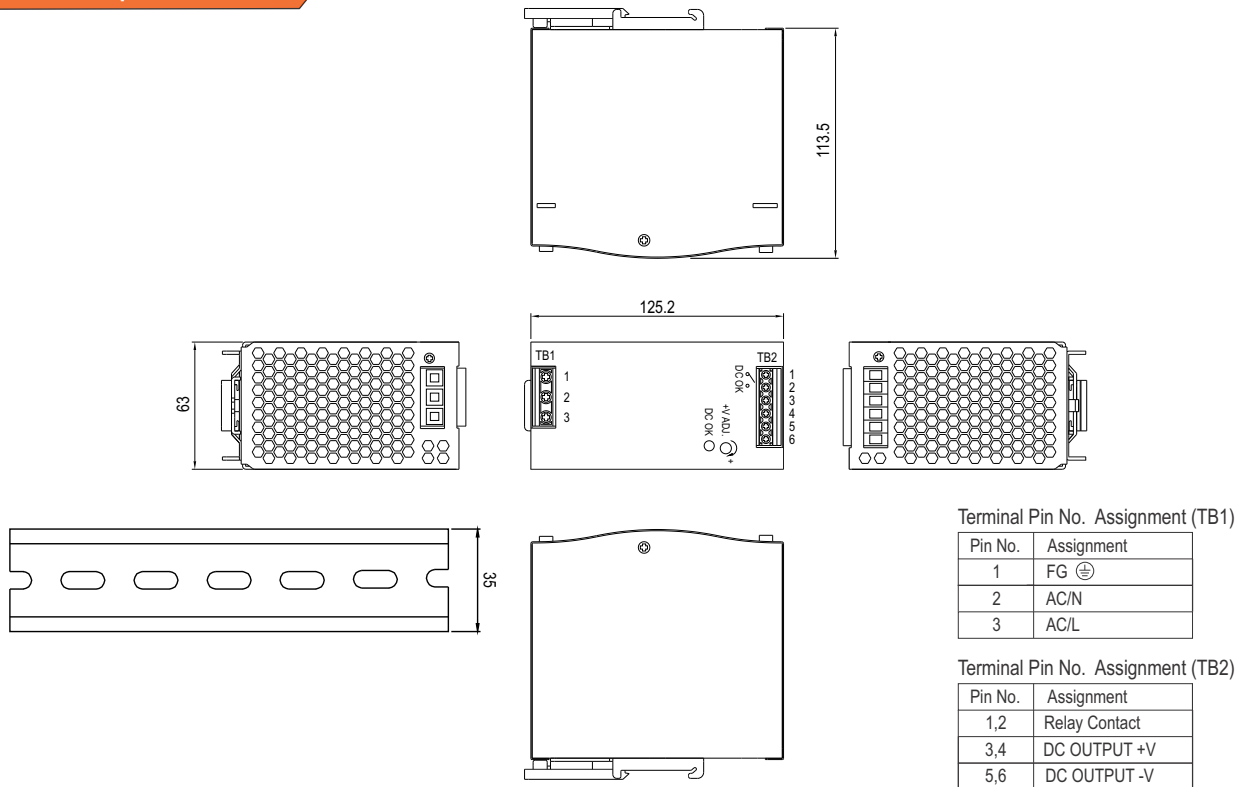


Block Diagram

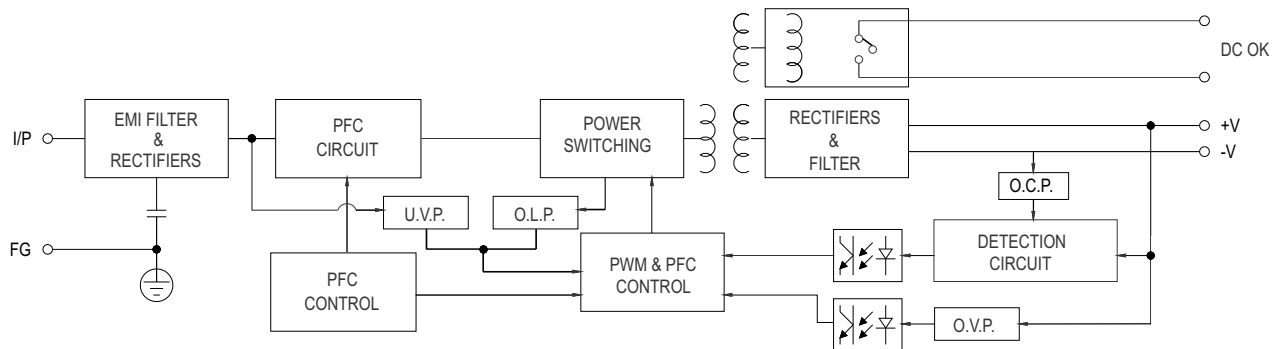


DC OK Relay Contact

Contact Close	PSU turns on / DC OK.
Contact Open	PSU turns off / DC Fail.
Contact Ratings (max.)	30V/1A resistive load.



Derating Curve

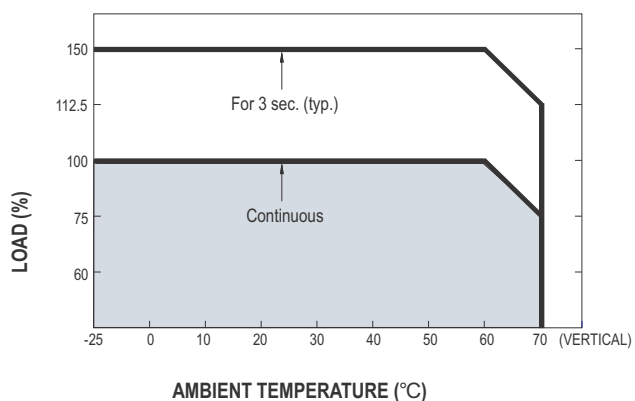

Output Derating VS Input Voltage

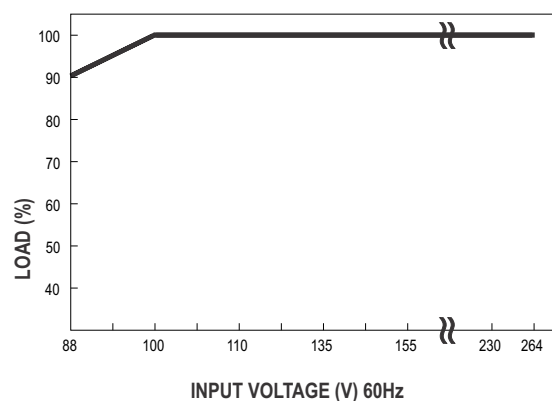

Peak Loading

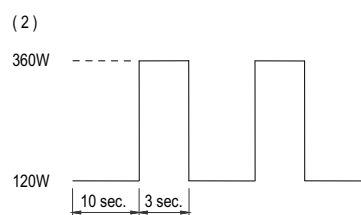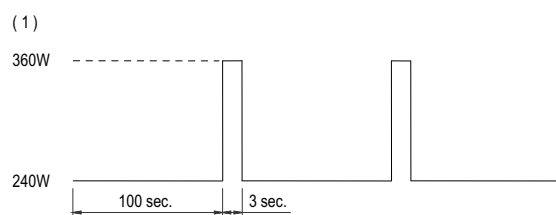



WERNER

Inventing Innovation...

H.Q.

Werner Electric Private Limited

Plot No.: 166, Hebbal Industrial Area, Mysore - 570016, India.
Tel: +91 73539 47299, E-mail: info@wernerelektrik.com

Werner Malaysia Sdn Bhd,

45-2, Jalan Tiara 2B, Bandar Baru Klang,
41150, Klang, Selangor, Malaysia.

Tel: +60 13 533 3348, E-mail: info@wernerelektrik.com

Werner Elektrik Türkiye

Ayazağa Mah. Mimar Sinan Sok. Seba Office Boulevard.
D Blok. No.: 21D/45 Sarıyer / İstanbul, Türkiye.

Tekefon: +90 539 829 25 07 , E-posta: info@wernerelektrik.com

www.wernerelektrik.com